


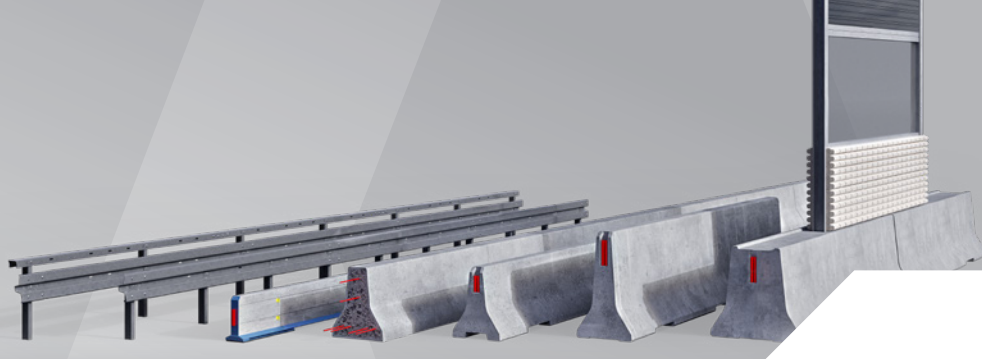

DELTABLOC®
SAFETY BARRIERS

DB 80P 6m T150S P5

H2 W1 B

pinned on asphalt or concrete

PRODUCT DATA SHEET


K733934A

Performance class	H2 W1 VI1 B
Working width W_N	W1 (0,6 m)
Vehicle intrusion VI_N	VI1 (0,5 m)
Dynamic deflection	0,10 m
Tested system length	48 m
EC Certification report	725241050_7

Product series	DB 80 Series
Tension bar	T150S
Design	Generation 2
Product variant	P5

System height	80 cm
System width	60 cm
Dimensions of element (l x w x h)	600 x 60 x 80 cm
Element weight / length	3.125 kg / 6 m


Mode of operation	double sided
Mode of installation	pinned on asphalt or concrete
Terminal anchoring	yes
Article number / Installation drawing	222042 / K733934

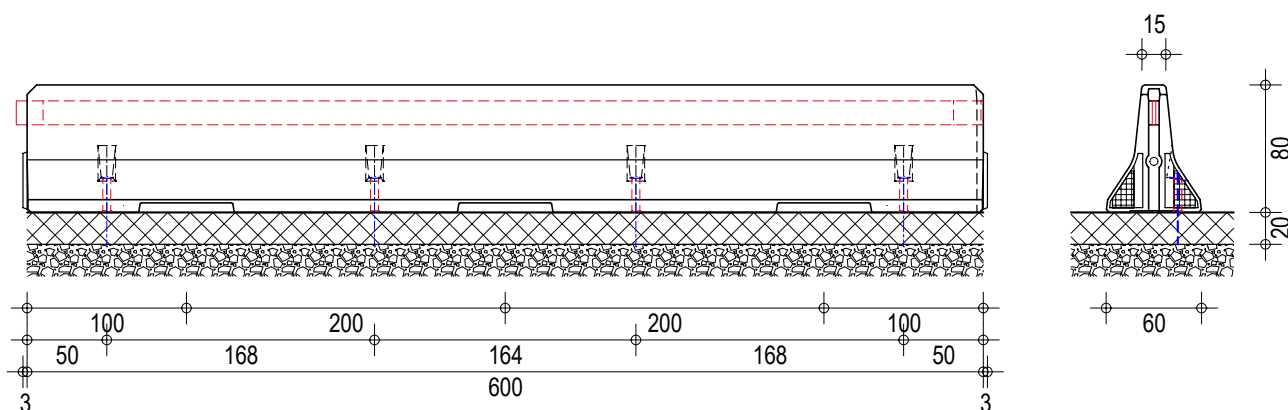

FIND ALL PRODUCT DETAILS ON
THE DELTABLOC® EXTRANET

Matching supplementary products,
SafeLink transitions etc.

Scan the QR code



THE NEW DB 80 SERIES **PROTECTS WITH MODULAR SAFETY**

The holistic H2 safety concept
for the central reserve, verge and bridge.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®
HOME OF ROAD SAFETY

DELTABLOC INTERNATIONAL GMBH

Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com