



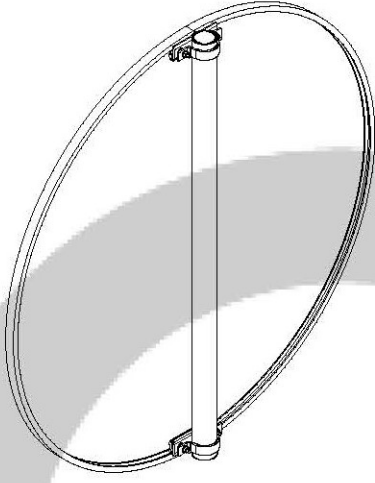
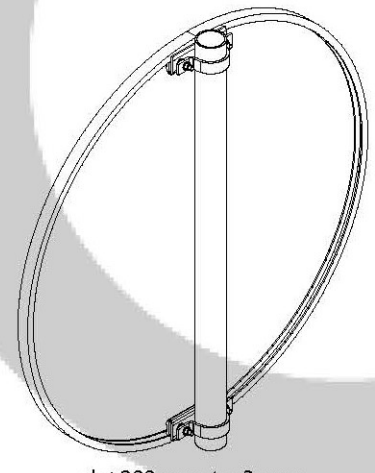
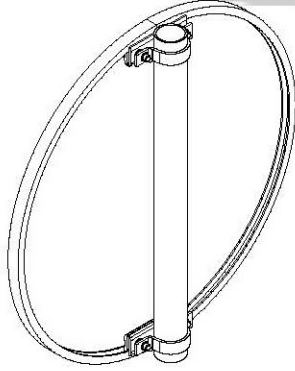
YDEEVNEDEKLARATION

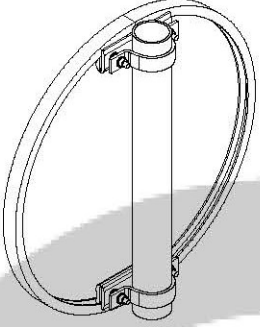
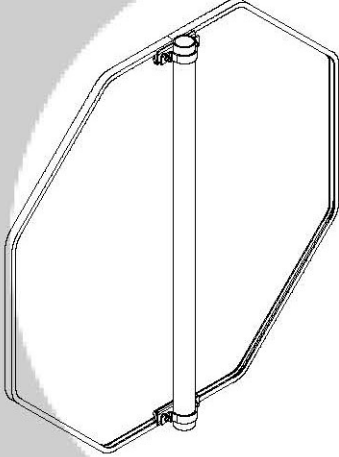
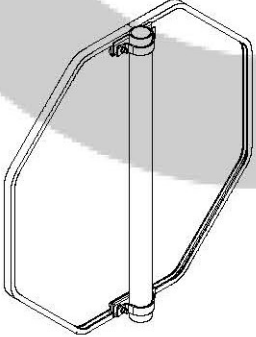
Nr. SR 00036

1. Varetypens unikke identifikationskode Fast lodrette trafikskilte med beskyttelseskant	
2. Tilsigtet anvendelse Permanent trafikskilt til montage på lige stander	
3. Fabrikant Saferoad Traffic A/S Hvidkærvej 33 5250 Odense SV	Producent Saferoad Traffic A/S Hvidkærvej 33 5250 Odense SV
4. System til vurdering og kontrol af konstansen af ydeevnen System 1	
5. Notificeret organ DBI Certification A/S Jernholmen 12 DK-2650 Hvidovre Nr: 2531 har udført bestemmelsen af varetype, typeberegning indledende og løbende overvågning af fabrikkens egen produktionskontrol (FPC) og udstedt EC Certifikatet Certifikat nr. 2531-CPR-CSS10036	
6. Harmoniseret produktstandarder EN 12899-1:2007 ZA.5	

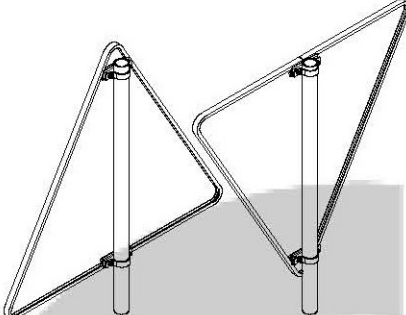
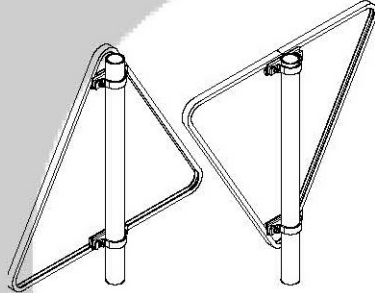

7. Deklareret ydeevne teknisk documentation

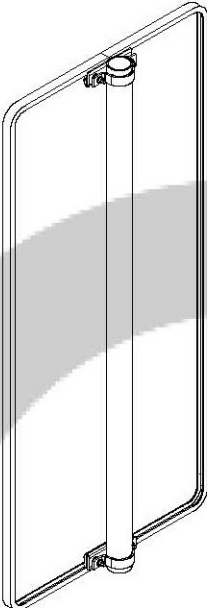
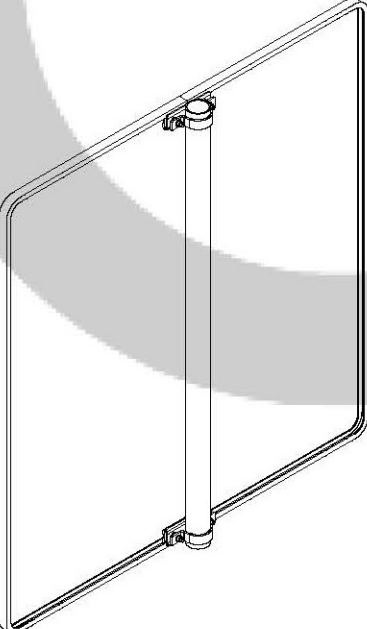
Annex 1

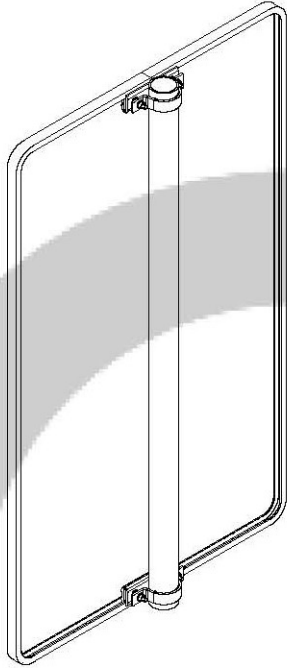
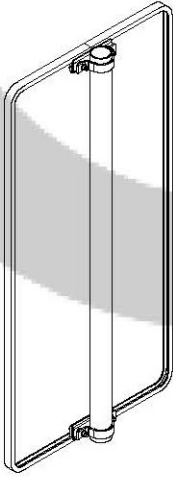
Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $d \leq 1200 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB5, TDT0, P2, E2 and SP1.
 $d \leq 900 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.
 $d \leq 700 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.

Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $d \leq 500 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.
 $h \leq 1250 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB5, TDT0, P2, E2 and SP1.	N/A
 $h \leq 900 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PLO, TDB5, TDT0, P2, E2 and SP1.

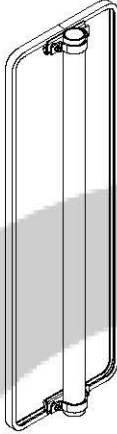

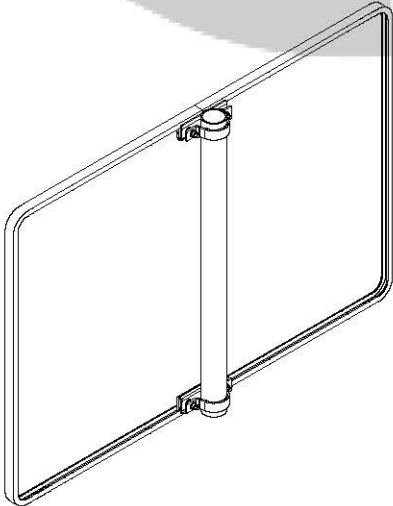


Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $s \leq 1250 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB4, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB4, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB5, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB5, TDTO, P2, E2 and SP1.
 $s \leq 900 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB3, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB3, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB3, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB4, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB4, TDTO, P2, E2 and SP1.
 $a \leq 500 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB1, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB2, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB2, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB3, TDTO, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB3, TDTO, P2, E2 and SP1.

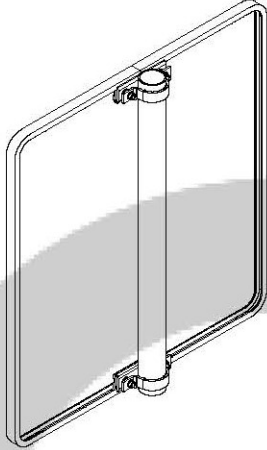
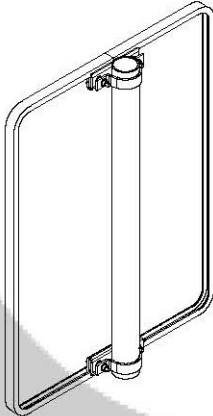
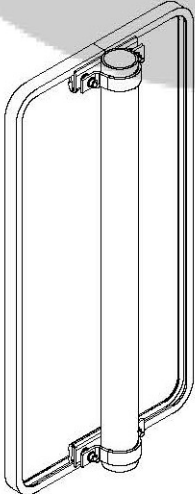
Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $h \times b \leq 1450 \times \leq 650 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.
 $h \times b \leq 1250 \times \leq 1200 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.

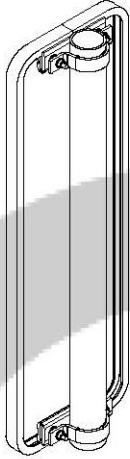
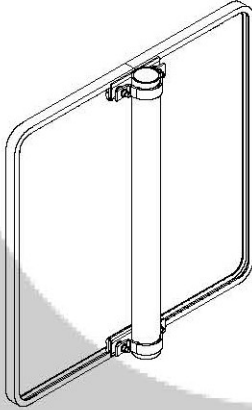
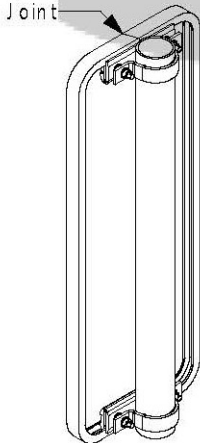
Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 <p>$h \times b \leq 1250 \times \leq 750 \text{ mm}, t = 2 \text{ mm}$</p>	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB5, TDT0, P2, E2 and SP1.
 <p>$h \times b \leq 1250 \times \leq 600 \text{ mm}, t = 2 \text{ mm}$</p>	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.

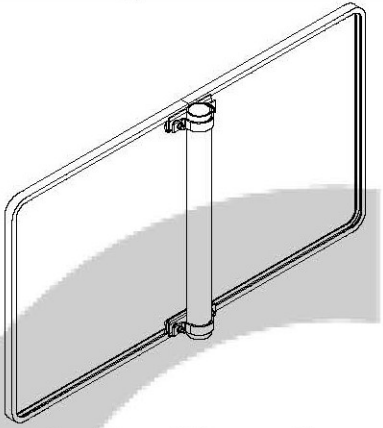


Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $h \times b \leq 1250 \times \leq 400 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.
 $h \times b \leq 1250 \times \leq 250 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB1, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB3, TDT0, P2, E2 and SP1.
 $h \times b \leq 800 \times \leq 1200 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB5, TDT0, P2, E2 and SP1.



Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $h \times b \leq 800 \times \leq 750 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.
 $h \times b \leq 800 \times \leq 600 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PLO, TDB4, TDT0, P2, E2 and SP1.
 $h \times b \leq 800 \times \leq 400 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSL0, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PLO, TDB3, TDT0, P2, E2 and SP1.

Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 $h \times b \leq 800 \times \leq 250 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB1, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.
 $h \times b \leq 700 \times \leq 700 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB4, TDT0, P2, E2 and SP1.
 $h \times b \leq 700 \times \leq 250 \text{ mm}, t = 2 \text{ mm}$	Sign plate and brackets: PAF1, WL1, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSLO, PLO, TDB2, TDT0, P2, E2 and SP1.

Sign, sizes and mounting system Protective edge: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Brackets: Minimum aluminium quality: $R_{p0,2} = 200 \text{ MPa}$ Sign plate: Minimum aluminium quality: $R_{p0,2} = 180 \text{ MPa}$	Classification according to wind load classes				
	Placed in WL1	Placed in WL2	Placed in WL3	Placed in WL4	Placed in WL5
 <p>$h \times b \leq 650 \times \leq 1200 \text{ mm}, t = 2 \text{ mm}$</p>	Sign plate and brackets: PAF1, WL1, DSL0, PL0, TDB3, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL2, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL3, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL4, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.	Sign plate and brackets: PAF1, WL5, DSL0, PL0, TDB4, TDT0, P2, E2 and SP1.



Resistance to horizontal loads		NPD To be declared on the support
Resistance to bending		NPD To be declared on the support
Resistance to torsion		NPD To be declared on the support
Fixings:		Pass. The signs, sizes are intended for mounting at the top of another straight steel pipe. Together the signs and the straight steel is the support for the sign. Glue for fixing the signs into the bracket according to DIN 53504: Load bearing capacity: ≥ 1.5 MPa Elasticity modulus: ≥ 0.65 MPa Charge on broken: ≥ 1.55 MPa Elongation at breaks: ≥ 300 % Shore A hardness: ≥ 40 Thermal resistance: -40 to 90°C Pressure force for tightening: 2 kN for the clamp. 5 kN for the brackets. M8 Screws, nuts and washers are minimum A2, class 70 ($f_{y,b} = 450$ MPa).
Temporary deflection (supports) -bending -torsion		NPD To be declared on the support
Permanent deflection		NPD
Performance under vehicle impact		NPD To be declared on the support



Declarations (Visibility)		Value/description/class/reference
Retroreflective signs: Daylight chromaticity & luminance factor	See relevant ETA's in Annex 2.	Pass
Non retroreflective signs: Daylight chromaticity & luminance factor		NPD
Retroreflective signs: Coefficient of retroreflection R_A	See relevant ETA's in Annex 2.	Pass
Declarations(External illumination)		Value/description/class/reference
Mean illuminance		NPD
Uniformity of illuminance		NPD
Declarations(Durability)		Value/description/class/reference
Impact resistance Sign face material	See relevant ETA's in Annex 2.	Pass
Resistance to weatering – sign face material: Retroreflective signs	See relevant ETA's in Annex 2.	Pass
Resistance to weatering – sign face material: Non retroreflective signs		Aluminium: None or anodizing 20 μ m, nature. Srews, nuts, and washers: Min. A2 or FZV.
Corrosion resistance		
Brackets		SP1 Minimum S235 Hot dip galavanized according to EN 1461
Srews, nuts and washers		M8: $f_y, b \geq 450$ MPa, minimum A2 or FZV SP1
Aluminium plate		SP1 Laquered AL-plate on exposed side if any.
Restistance to penetration of dust and water		NPD



Annex 2

TECHNICAL BASIS

Title	Date
Saferoad Daluiso A/S Calculation of minor traffic signs (ITC) Shapes and sizes for signs without protection edge mounted on brackets made of presharped rectangular steel bars, 1 th Edition.	September 2017
3M Advanced Engineer Grade Prismatic 7930 ETA 16/0006 Version 01 ETA 17/0465 Version 01	2016-03-03 2017-07-26
3M High Intensity Prismatic 3930 ETA 18/0290 Version 01 ETA 17/0491 Version 01	2018-06-21 2017-07-26
3M Engineering Grade Prismatic 3430: ETA 10/0118 Version 02 ETA 12/0550 Version 01	2016-02-10 2018-06-06
3M Diamond Grade DG: ETA 18/0405 Version 01 ETA 17/0490 Version 02	2018-06-21 2019-06-05
3M Flexible Engineer Grade Prismatic 7600 ETA 19/0839 Version 01	2020-04-17

Ydeevnen for den vare, der er anført ovenfor, er i overensstemmelse med den deklarerede ydeevne. Denne ydeevnedeklaration er udarbejdet i overensstemmelse med forordning (EU) nr. 305/2011 på eneansvar af den producent, der er anført ovenfor.

Underskrevet for fabrikanten:

Odense d. 12-12-2024

Mads Norman

Adm. direktør